
WO 2006/113301 PCT/US2006/013765

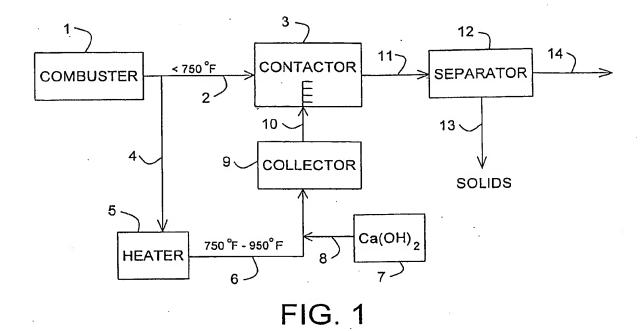

17 -15 -25 -24 27-< 750 °F CONTACTOR COMBUSTER SEPARATOR 16 -- 23 26 -22 < COLLECTOR SOLIDS 20 18-Ca(OH)₂ 750°F - 950°F HOT AIR

FIG. 2

19 -

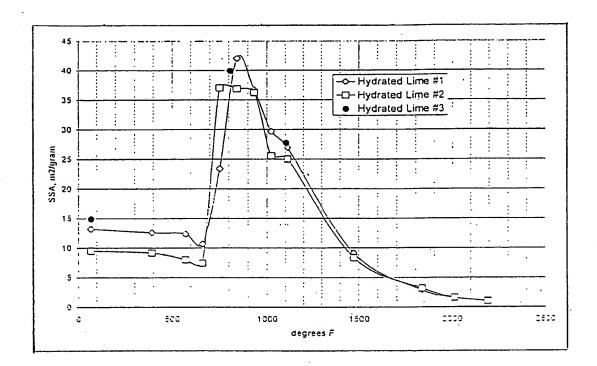


FIG. 3

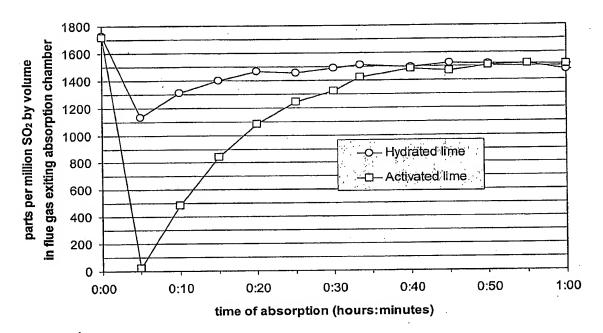


FIG. 4

WO 2006/113301 PCT/US2006/013765

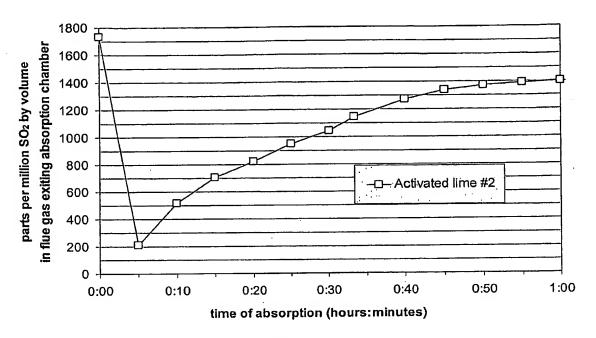


FIG. 5

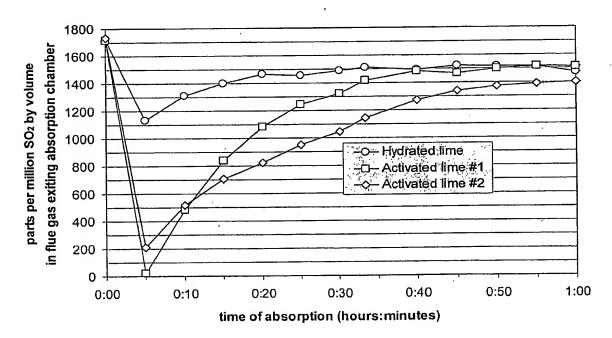


FIG. 6